

G137

REV

ECN NO.

1. Specification:

- 1.1 Current rating:1.0A AC/DC
1.2 Voltage rating:50V AC/DC
1.3 Contact resistance:30 milliohms max
1.4 Insulation resistance:500 Mega ohms min
1.5 Withstanding voltage:500V AC/minute
1.6 Temperature range:-25°C to +80°C
2. Material and Plating
2.1 Insulator:Hight Temp. Plastic(UL94V-0)
2.2 Contact: Phosphor Bronze
2.3 Finish: Gold Plated

ORDERING INFORMATION

$\overline{U} \text{ } \overline{X} \text{ } \overline{F} \text{ } 08 \text{ } \overline{U} \text{ } - \text{ } \overline{C} \text{ } \overline{X} \text{ } \overline{X}$
(1)(2)(3) (4) (5) (6)(7)(8)

1. SERIES NO.

U: USB CONNECTOR SERIES

2. USB TYPE

9: MINI USB 8PIN DOUBLE TYPE

0: MINI USB 8PIN SINGLE TYPE

3. USB MALE & FEMALE TYPE

F: FEMALE

4. NUMBER OF PIN

08: 8 POSITIONS

5. TAIL CONSTRUCTION TYPE

U: TERMINAL: SMD TYPE

SHELL: SMD TYPE

6. HOUSING COLOR CODE AND MATERIAL

C: COLOR:BLACK AND MATERIAL:PCP

7. CONTACT PLATING

4: GOLD FLASH OVER ALL

5: 15u" GOLD PLATING OVER ALL






6: 30u" GOLD PLATING OVER ALL

8. SHELL PLATING


N: NICKEL PLATING

T: TIN PLATING

G: GOLD PLATING

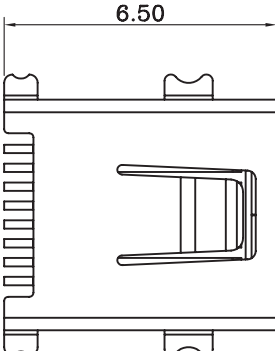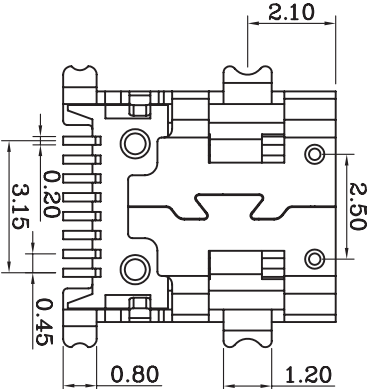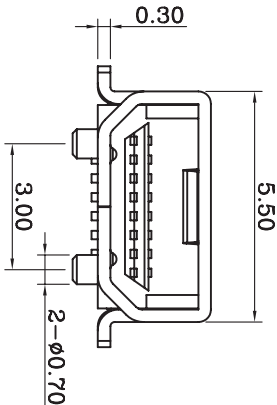

Recommended PCB Layout

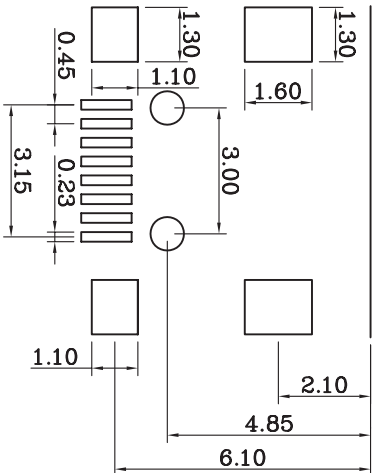

DRAWING:

万 军

CHECKED:

杨 朝 阳

APPROVAL:

杨 朝 阳

GENERAL TOLERANCE

X: ± 0.38

.XX: ± 0.25

.XXX: ± 0.100

X°: $\pm 2^\circ$

.XX°: $\pm 1^\circ$

.XXX°: $\pm 0.5^\circ$

UNIT: MM

SCALE: 1/1

SHEET: 1/1

PROJECTION:



DESCRIPTION:

Mini USB 8Pin B Type Female SMT

深圳市山谷道电子有限公司

电话: 0755-27759859 传真: 0755-27759850

PART NO:

U9F08U-CXX

REV: 1.0

DRAWING NO: P15075BMR-08-SM2-01

SIZE: A4