

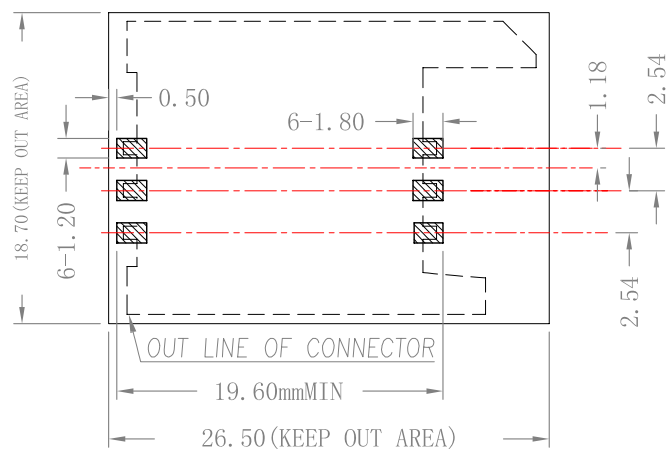


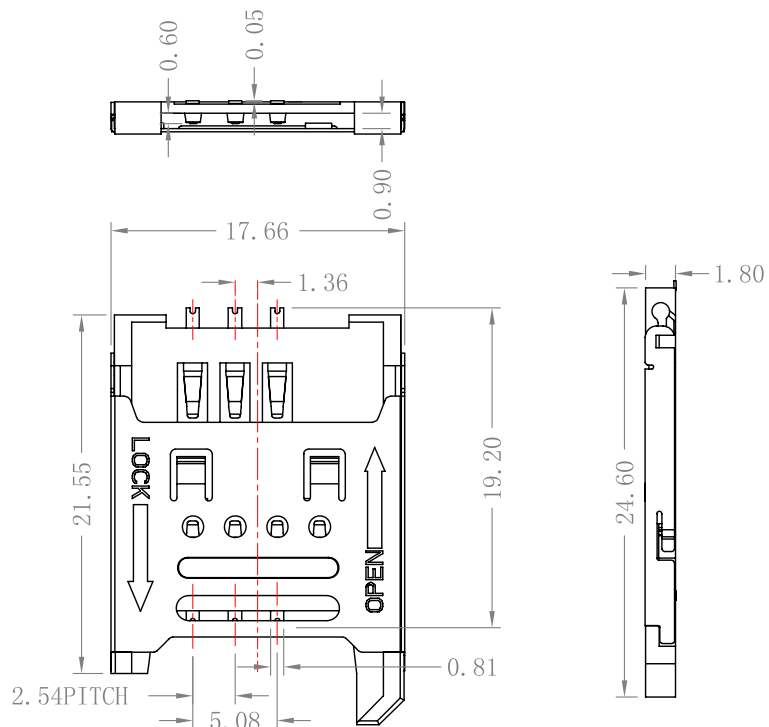

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

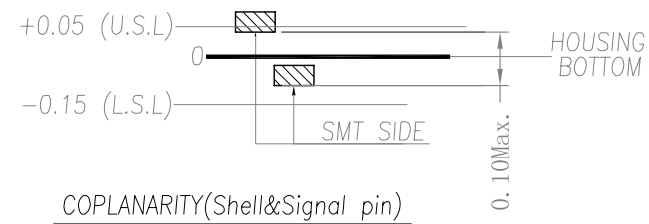

NOTES:

1) MATERIAL:

1-1 HOUSING:THERMOPLASTIC,UL 94V-0,COLOR:BLACK

1-2 CONTACT:COPPER ALLOY, T=0.15mm

1-3 SHELL:STAINLESS STEEL T=0.20mm

2) FINISH:

2-1 CONTACT:GOLD PLATING ON CONTACT AREA(SEE P/N DESCRIPTION)
100u" MIN MATTE Sn PLATING OR 1u" MIN Au PLATING ON SOLD AREA,
50u" MIN NICKEL UNDERPLATING OVER ALL

2-2 SHELL:50u" MIN NICKEL UNDERPLATING OVER ALL

2-3 HOLD:50u" MIN NICKEL UNDERPLATING,Matter Sn 100~200u" OVER ALL

3) PRODUCT SPECIFICATIONS:

3-1 VOLTAGE RATING: 50V

3-2 CURRENT RATING: 1.0A

3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN

3-4 CONTACT RESISTANCE: 50 MILL.OHM MAX

3-5 OPERATION TEMPERATURE: -20° TO +85°

3-6 DURABILITY: 3000 CYCLFS

深圳市山谷道电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM 6PIN 掀盖	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	WXL29-SIM06-180
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	WXL29-SIM06-180
			SHEET NO.	1 OF 1