

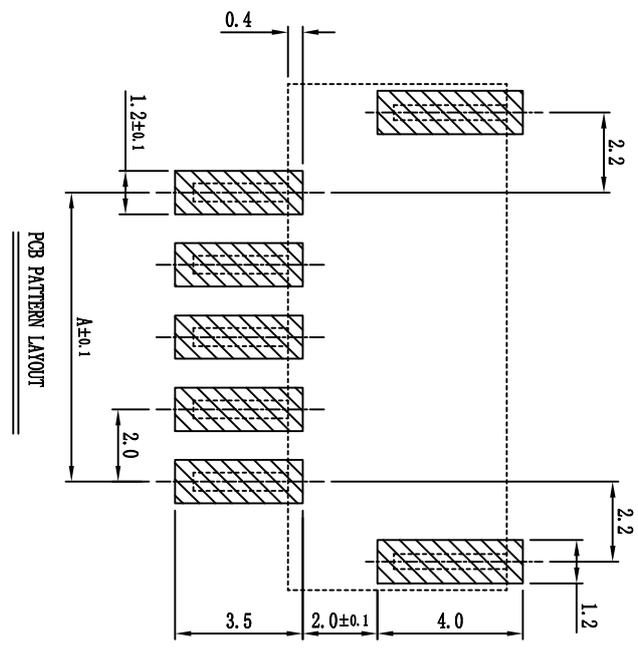
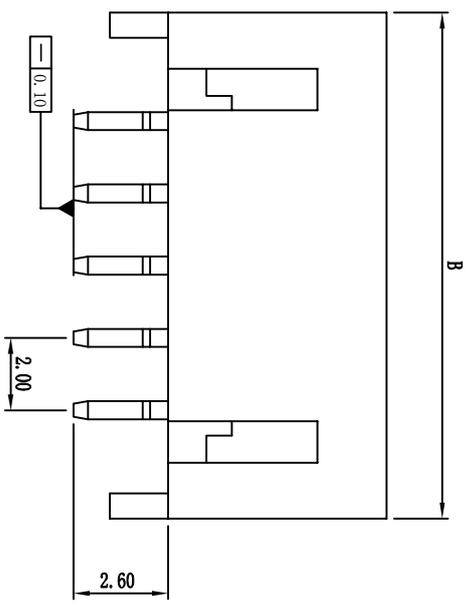
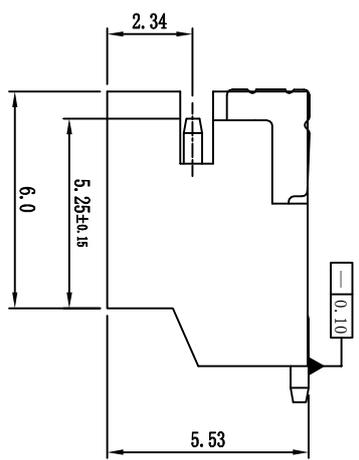


股次 (REV)	变更编号 (ECN NO)	说明 (DESCRIPTION)	日期 (DATE)	核准 (APP)
X1		初版发行		

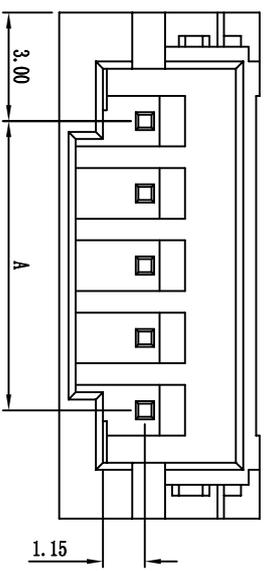

CKT	DimA	DimB
002	2.0	8.0
003	4.0	10.0
004	6.0	12.0
005	8.0	14.0
006	10.0	16.0
007	12.0	18.0
008	14.0	20.0
009	16.0	22.0
010	18.0	24.0
011	20.0	26.0
012	22.0	28.0
013	24.0	30.0
014	26.0	32.0
015	28.0	34.0
016	30.0	36.0
017	32.0	38.0
018	34.0	40.0
019	36.0	42.0
020	38.0	44.0

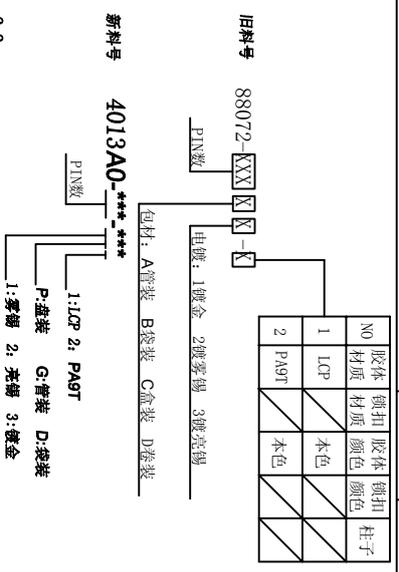

Electrical

Voltage: 50 V AC(rms)/DC
 Current: 1.0 A AC(rms)/DC
 Contact Resistance: 40 mΩ max
 Dielectric Withstanding Voltage: 250 V AC/rms
 Insulation Resistance: 800 MΩ min
 Operating Temp: -25° C~+85° C

使用类别 (EXTEND)	USE	品名 (TITLE)	深圳市山谷道电子有限公司	
2.0WTB 贴片		2.0WTB 贴片 客户图面	图号 (DWG NO):	4013A0
尺寸公差	角度公差	数量 (QTY)	料号 (P/N):	4013A0-***-***
DIMENTION .0 ±0.30 .0 ±0.20 .00 ±0.10 .000 ±0.05	ANGLES .0 ±3° .00 ±2° .00 ±1°	表面处理 (FINISHED)	页 数 (SHEET)	1/1
		审核 (CID)	比例 (SCALE)	1:1
		安路路		
		2014.6.28		