
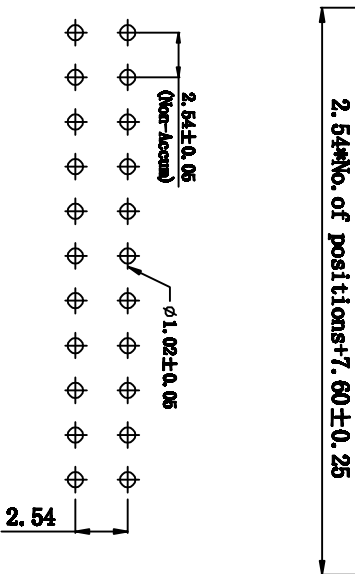
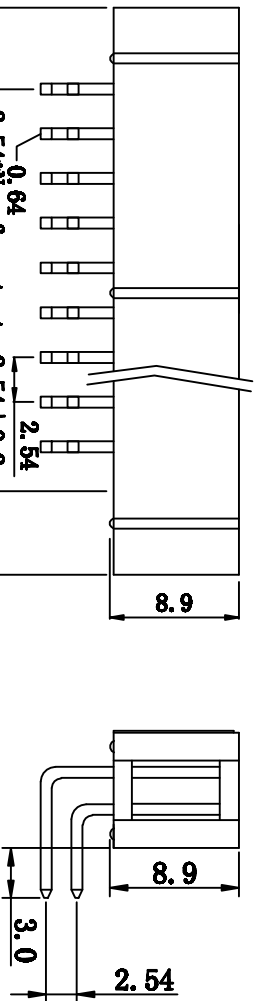


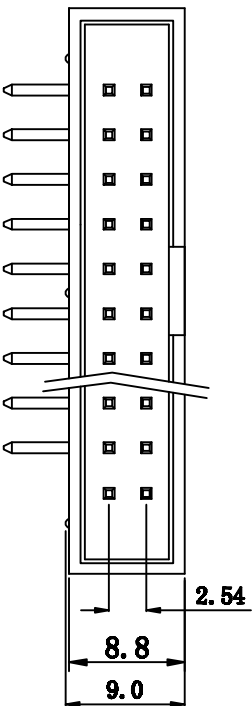

SPECIFICATIONS

Current Rating: 3amps
 Insulator resistance: 5000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° C to +105° C
 Insulator Material: PBT
 Contact Material: Brass
 Plating: Gold Flash
 UNIT: MM

UNSPECIFIED TOLERANCE: ±0.20

Dimensions list


Contacts Per row	Dimensions	
	A	B
20	58.46	48.36
21	61.00	50.90
22	63.54	53.44
23	66.08	55.98
24	68.62	58.52
25	71.16	61.06
26	73.70	63.60
27	76.24	66.14
28	78.78	68.68
29	81.32	71.22
30	83.86	73.76

深圳市山谷道电子有限公司

电话: 0755-27759859
 传真: 0755-27759850

BOX HEADER PH2.54mm DIP 90度 2*NP

Customer:	Approval:	Unit Scale	Date
Drawing No:张建军	Check:	mm	08.12.06



P/NO:
 Pin Longer:
 Signatuer: