


Straight Dip Type/ Right Angle Dip Type
S.M.T Type

Pitch:2.00 x2.00mm

Series
302

sgd conn

[Http://www.sgdconn.com](http://www.sgdconn.com)




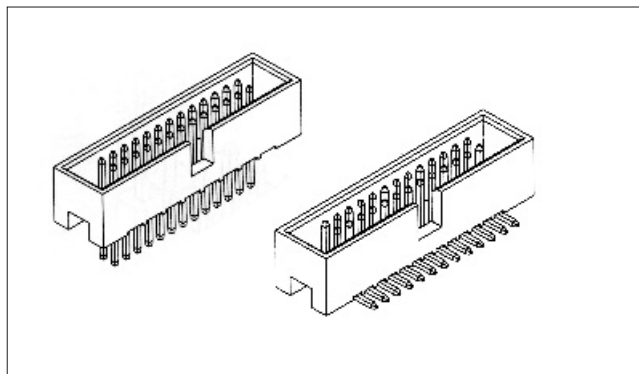


SPECIFICATIONS:

Current Rating: 2.0 AMP
Contact Resistance: 30m• Max
Insulation Resistance: 1000M• Min
Withstand Voltage: 500VAC/minute
Operation Temperature: -40°C to +105°C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ " Ni
Insulator: Glass Filled Polyester(UL94V-0)
Standard: Nylon-6T

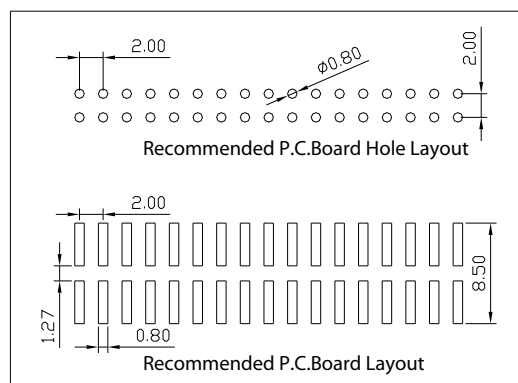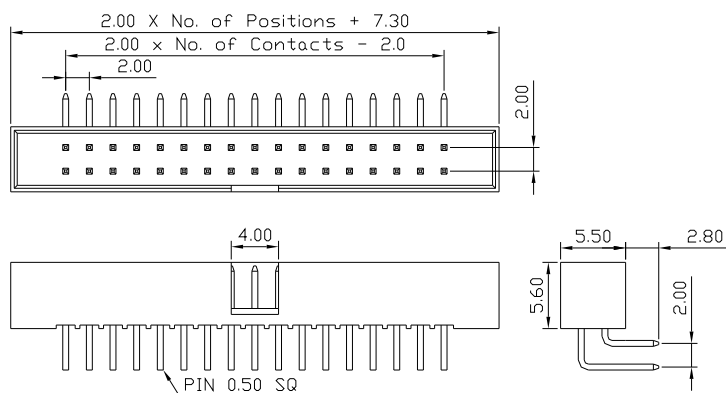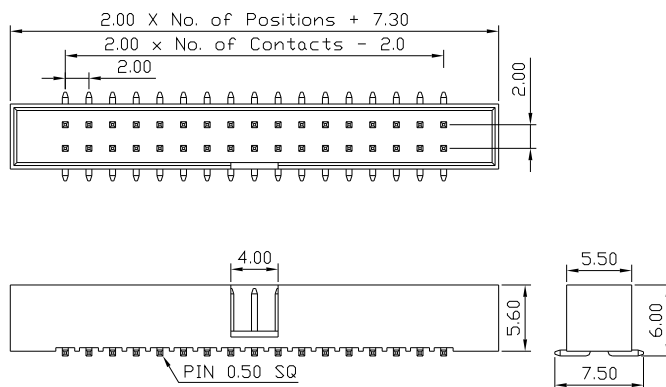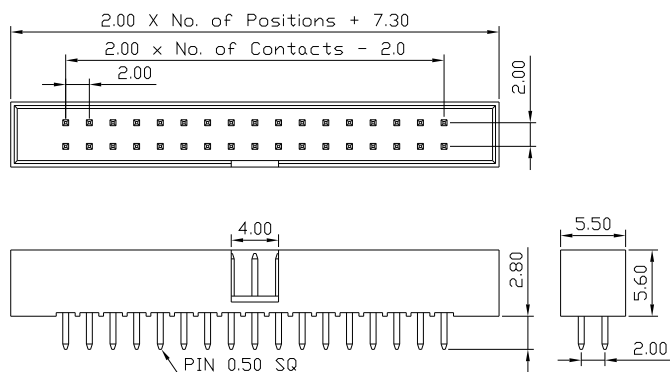

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
30 2 5 XX X X X X 0

① Series No.:
30 = Box Header

② Pitch:
2= 2.00 x2.00mm

③ Insulator Height:
6 = 5.6mm

④ Number of Contacts:
10 Pin ~64 Pin

⑤ Tail & Mounting Style:
S=Straight Dip Type
R=Right Angle Dip Type
M=S.M.T Type

⑥ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑦ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑧ Color:
B=Black
U=Blue
R=Red
W=White
Y=Yellow
G=Grey

⑨ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.