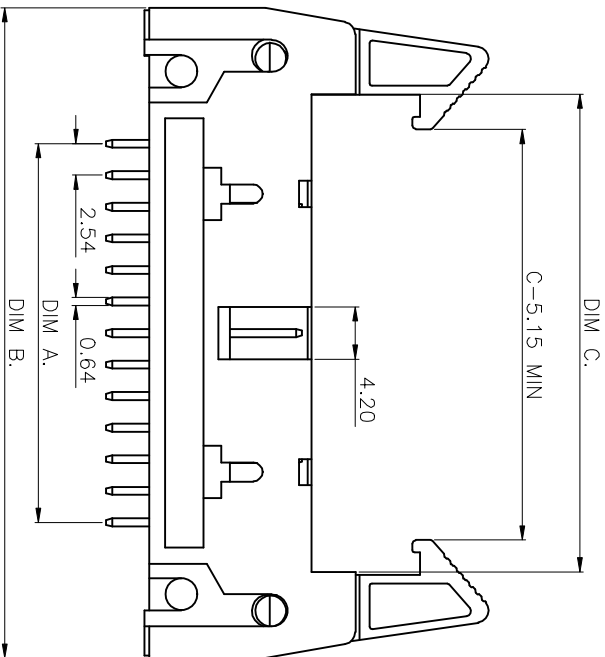



DIMENSION TABLE:			
POS	Dimensions		
	DIM A.	DIM B.	DIM C.
6pin	5.08	26.94	13.04
8pin	7.62	29.48	15.58
10pin	10.16	32.02	18.12
12pin	12.70	34.56	20.66
14pin	15.24	37.10	23.20
16pin	17.78	39.64	25.74
18pin	20.32	42.18	28.28
20pin	22.86	44.72	30.82
24pin	27.94	49.80	35.90
26pin	30.48	52.34	38.44

POS	Dimensions		
	DIM A.	DIM B.	DIM B.
28pin	33.02	54.88	40.98
30pin	35.56	57.42	43.52
34pin	40.64	62.50	48.60
36pin	43.18	65.04	51.14
40pin	48.26	70.12	56.22
44pin	53.34	75.20	61.30
50pin	60.96	82.82	68.92
60pin	73.66	95.52	81.62
64pin	78.74	100.60	86.70

NOTE:
MATERIAL
HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
CONTACT: COPPER ALLOY.
CONTACT PLATING: GOLD 0.8U" OVER NICKEL.
ELECTRICAL
CURRENT RATING: 1AMP.
DIELECTRC WITHSTANDING VOLTAGE:1000VAC MIN.
CONTACT RESISTANCE: 20mΩMAX.
INSULATION RESISTANCE:1000MΩMIN.
ENVIRONMENTAL
TEMPERATURE RANGE: -40° C TO+105° C.

深圳市山谷道电子有限公司

电话: 0755-27759859
传真: 0755-27759850

版本 (REV)	A/0	X.XX	0.30	单位 (UNIT)	MM	绘图 (DRAWN BY)	客户料号
		X.XX	0.20	比例 (SCALE)	FRIG	校对 (CHECKED BY)	料号 (PART NO)
		X.XXX	0.05	日期 (DATE)	2024.04.04	批准 (APPROVE)	图号 (DRAWING NO)

Stacking Ejector Header 2.0mm DIP/90°
--