

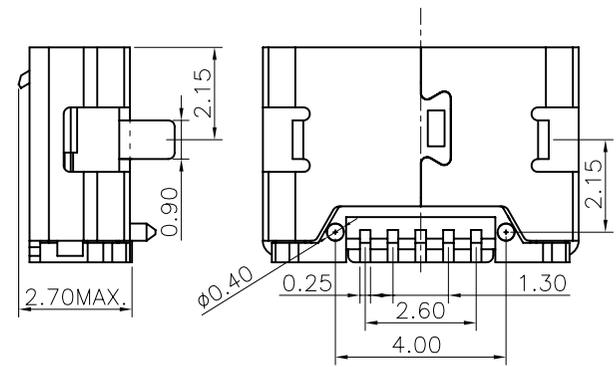
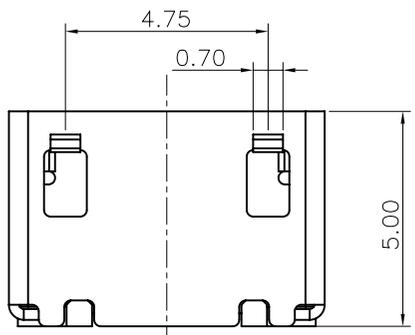


备注:
 电气性能:
 接触阻抗: 30 毫欧 (最大)
 绝缘阻抗: 100 兆欧 (最小)
 耐高压: 100V AC 一分钟

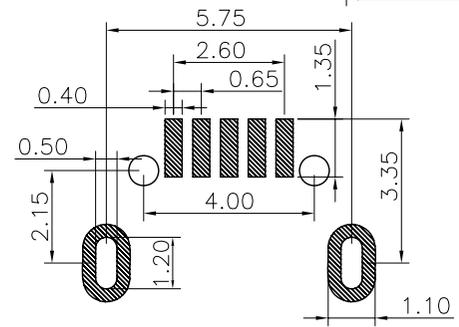

材料:
 塑胶: LCP
 端子: C2680
 外壳: C2680
 电镀:
 端子: 镀全金1u",

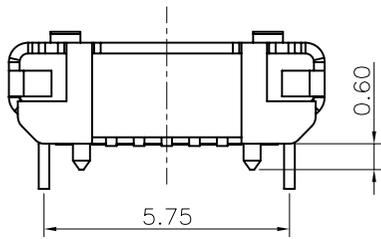

91-US01-XXX
 664: 外壳镀雾锡
 665: 外壳镀镍

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ±0.10
.XX ±0.20
.X ±0.30
.X' ±3'

产品名称: MICRO USB 5P/F B型插脚 无卷边
 PART NAME:

料号: 91-US01-664/665
 PART No: C

深圳市山谷道电子有限公司

电话: 0755-27759859
 传真: 0755-27759850

REV:	DESCRIPTION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION	APPROVED
					PROJECTION:	THIRD ANGLE PROJECTION	CHECKED
					UNIT:	SCALE	REV(NO)
					MM	1:1	A
						SHEET	DRAWN
						1 OF 1	DATE
							2011. 06. 03