




REV.	Q'TY	ECN. NO.	APR.	DATE





NOTES:

MATERIALS

- HOUSING:
HI-TEMP.PLASTIC UL 94V-0 BLACK
- CONTACT
COPPER ALLOY,T=0.15mm
GOLD PLATED ON CONTACT AREA
GOLD FLASH PLATED ON SOLDER TAILS UNDER NICKEL PLAED
- SHELL:
STAINLESS STEEL OR COPPER ALLOY T=0.3mm
MATTIE TIN PLATING OVERALL UNDER NICKEL PLATED

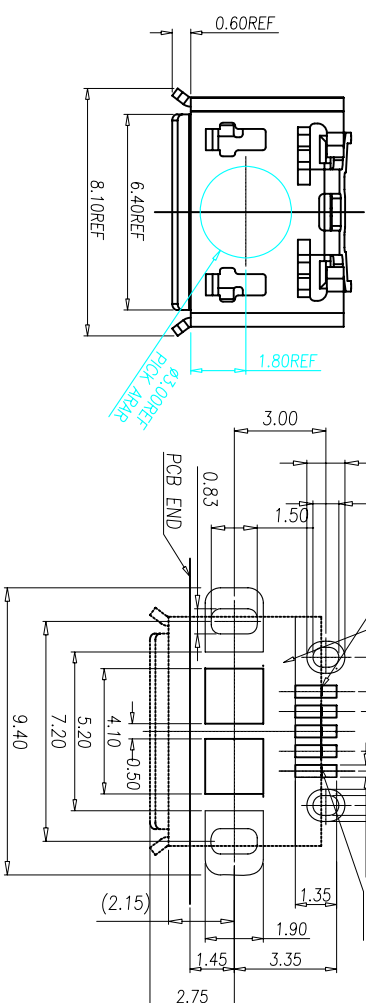


PCB LAYOUT(±0.05)

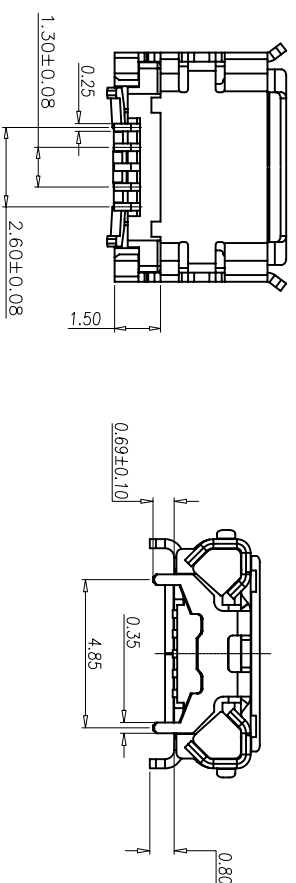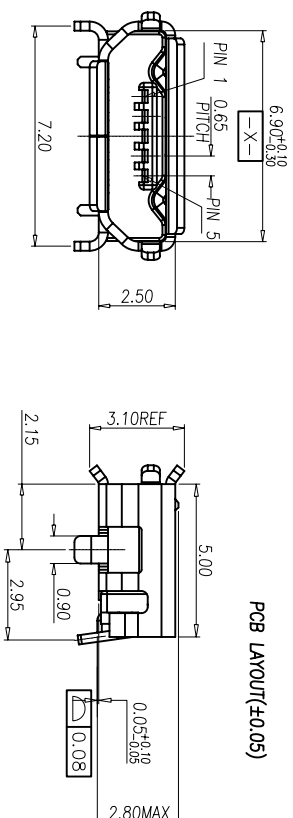

SPECIFICATIONS

- VOLTAGE RATING:30V AC
- CURRENT RATING:WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
1.0A(FOR TERMINAL NO.2,3 AND 4)
WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
1.8A(FOR TERMINAL NO.1 AND 5)
0.5A(FOR TERMINAL NO.2,3 AND 4)
- INSULATION RESISTANCE:100M MIN/AT 100V DC
- DIELECTRIC WITHSTANDING VOLTAGE:100V(r.m.s)AC FOR 1 MINUTE
- CONTACT RESISTANCE:30m MAX.
- OPERATING TEMPERATURE:-30 TO +80°

4) PART No.:

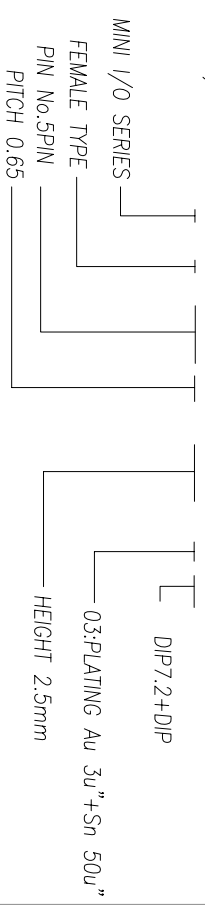

深圳市山谷道电子有限公司

JAMES 02/08/09

MICRO USB 5PIN RECEPTACLE DIP

SAMLI 02/08/09

A4

CUSTOMER DRAWING