


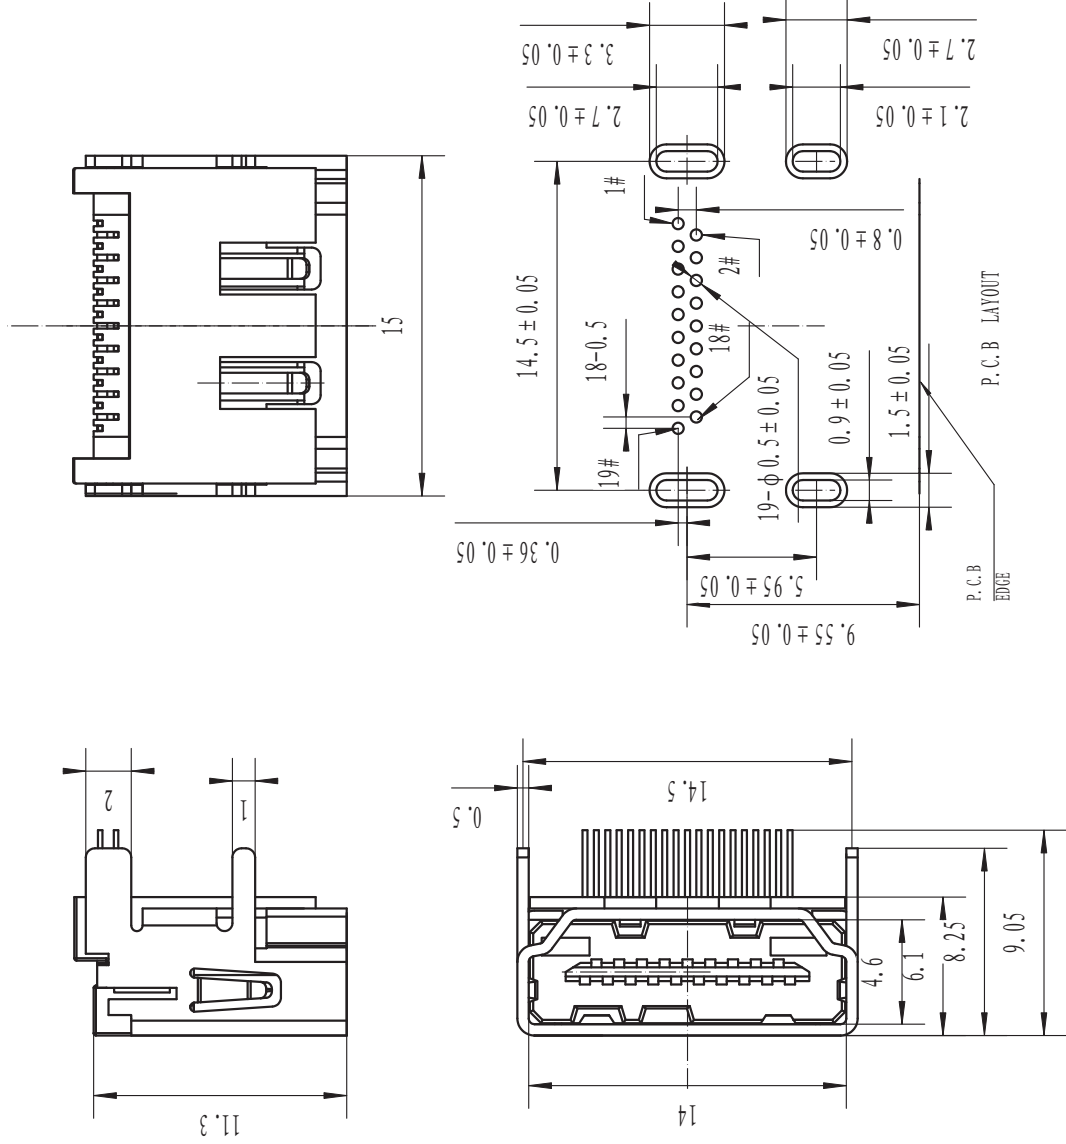

NOTES:

*Material

Body: LCP Rated: Color: Black.
Shield: Brass
plating: Nickel Plating.
Contact: Phosphor Bronze.
plating: Gold plating Over Nickel on contact Area; Tin plating on solder tail

*Electrical Specification

Operation Voltage: 40 VAC max
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 2000 Megohms min.
Dielectric Withstanding Voltage: 500VAC

*Environmental

Operating Temperature: -20C to +85C

*How TO Order

HDMI 19 A 3 L 1 P F 3 U 4
Series NO.
Number of Contacts
Gold A: 15U; B: 30U;
3: SMT Type
L: LCP
1: Black
W: Winding Mark
Blank: No Mark C: CDE
4: Ni 5: pure Dim Tin
U: Lead Free Blank: Sn-Pb
3: Tray 5: Reel
F: With Flang (7.5)
L: With Flang (12.0)
B: Brass
P: Phosphor Bronze

SZ-HDMI-05A

Customer:	Approval	Check	Drawn	Unit	Scale	Date
Drawing No:			babm	mm		
P/No: HDMI-05A						Pin Longer Signature

深圳市山谷道电子有限公司

深圳市山谷道电子有限公司 电话: 0755-27759859 传真 0755-27759850 宝安区西乡镇铁岗益成工业园